



PAINTED FIXED HOSE REELS

Oil and similar **150 bar**



S. 390

S. 430

S. 530

S. 540


S. 560

The same models, swivelling version, on page 372


The **template** supplied, facilitates drilling of the holes and therefore hose reel fixing.



The **quick coupling** support (see page 394) that facilitates installation in battery is available by request.



The **adjustable arms** can be easily repositioned according to needs (see page 396).



Hose reel with hoses in black synthetic rubber and galvanised steel fittings

- carbon steel swivel joint
- "polyurethane" seals



Article	Hose length	Hose ϕ	Connection inlet	Connection outlet
8390.400	/	without hose	F 1/2"G	F 3/8"-1/2"G
8390.401	12m (995.312)	3/8"	F 1/2"G	M 1/2"G
8390.402	17m (995.317)	3/8"	F 1/2"G	M 1/2"G

No. 1 packing m^3 0,050 from kg 11 to 18

8430.400	/	without hose	F 1/2"G	F 1/2"G
8430.401	10m (996.310)	1/2"	F 1/2"G	M 1/2"G
8430.402	15m (996.315)	1/2"	F 1/2"G	M 1/2"G

No. 1 packing m^3 0,065 from kg 14 to 24

8530.400	/	without hose	F 1/2"G	F 1/2"G
8530.401	20m (996.320)	1/2"	F 1/2"G	M 1/2"G
8530.402	25m (996.325)	1/2"	F 1/2"G	M 1/2"G

No. 1 packing m^3 0,065 from kg 19 to 42


8540.400	/	without hose	F 1"G	F 1"G
8540.401	15m (997.515)	3/4"	F 1"G	M 3/4"G
8540.402	20m (997.520)	3/4"	F 1"G	M 3/4"G
8540.403	15m (998.515)	1"	F 1"G	M 1"G
8540.405	/	without hose	F 1/2"G	F 1/2"G
8540.406	30m (996.330)	1/2"	F 1/2"G	M 1/2"G

No. 1 packing m^3 0,120 from kg 24 to 40

8560.400	/	without hose	F 1"G	F 1"G
8560.401	30m (997.530)	3/4"	F 1"G	M 3/4"G
8560.403	40m (997.540)	3/4"	F 1"G	M 3/4"G
8560.404	20m (998.520)	1"	F 1"G	M 1"G
8560.405	30m (998.530)	1"	F 1"G	M 1"G
8560.406	/	without hose	F 1/2"G	F 1/2"G
8560.407	40m (996.340)	1/2"	F 1/2"G	M 1/2"G
8560.408	50m (996.350)	1/2"	F 1/2"G	M 1/2"G
8560.409	60m (996.360)	1/2"	F 1/2"G	M 1/2"G

No. 1 packing m^3 0,200 from kg 30 to 80

OVERALL DIMENSIONS

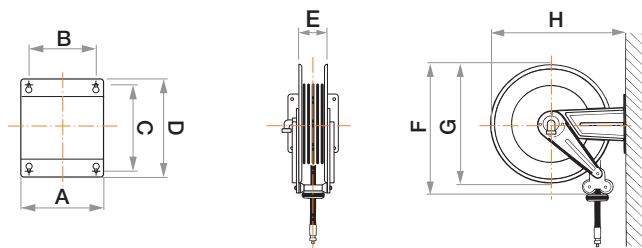

Art.	A	B	C	D	E	F	G	H
S. 390	186	140	196	226	110	400	ϕ 390	410
S. 430	186	140	196	226	115	460	ϕ 420	460
S. 530	203	153	220	258	115	550	ϕ 510	560
S. 540	300	218	228	268	190	550	ϕ 510	573
S. 560	488	399	238	272	368	522	ϕ 510	578