

**TEC AIR450 Air Operated Grease Gun.**

High performance 50:1 Ratio, delivering 5000 Psi at 100 Psi air pressure.

Supplied with rigid outlet tube and hydraulic connector.

Suitable for use with bulk grease or 450gram cartridge.

Each operation of the trigger delivers approximately 1gram of grease.

The Workshop and Industrial Lubrication Specialist

The TEC AIR450

The high pressure TEC AIR450 air operated grease gun develops over 70 MPa (5,000 psi) greasing pressure for the most stubborn bearings. The 750g bulk grease capacity also suits 450g grease cartridges. Supplied with a sturdy rigid tube and hydraulic connector which gives maximum grip without leaks. High pressure flexible hose and alternative connectors are available. High pressure heavy steel barrel resists damage.

Specification

Rigid Tube & Hydraulic Connector	Barrel Capacity		Weight	Vol per Stroke	Operating Pressure
	Bulk	Cartridge			
V5715 HF4048	750g	450g	2.3kg	1.0cc	33MPa 5000psi


Tubes and Connectors

A comprehensive range of connectors and extension tubes is available enabling any type of lubrication point to be serviced. It includes the straight rigid extension tube and the flexible versions shown right.

The following illustrations identify the various connections available for use with the TEC AIR450.



Type	Length	Part No.
Rigid	130mm(5")	V5715
Flexible	250mm(10")	PNH3009.10
Flexible	460mm(18")	PNH3009.18

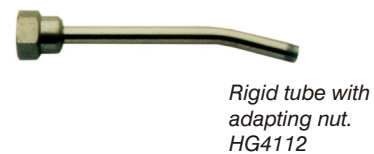

Tecalemit Australasia

Head Office Manufacturing:
Adelaide Ph (08) 8243 5200, Fax (08) 8347 0855
Australia free call 1800 685 577 free fax 1800 685 533