


Ratio **1:1** Capacity **160 l/min**

Membrane **NBR**

The transfer diaphragm pumps in die-cast aluminium, with high-quality components, ensure lasting and reliable operation even in extreme conditions. Ideal for transferring fluids even in the presence of suspended solids.

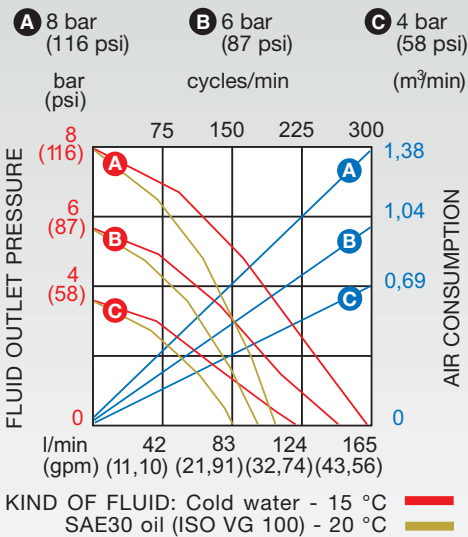

Article	33/101160
Pump material	Aluminium
Membrane material	NBR High Nitrile
Ball valve material	Hytrek
Compatible fluids	Water, mineral-vegetable oils, diesel oil
Compression ratio	1:1
Air inlet connection	F1/2" G
Fluid inlet-outlet connection	F1.1/4" x F1.1/4" G
Air working pressure	2-6 bar
Air max. pressure	8 bar
Average air consumption	1200 l/min
Relative flowrate (free outlet at 8 bar)	160 l/min
Noise level	75 dB
Deliverable oil temperature	-10+50°C
Max. solids diameter	ø 2 mm

No. 1 packing
 m³ 0,032
 kg 16